
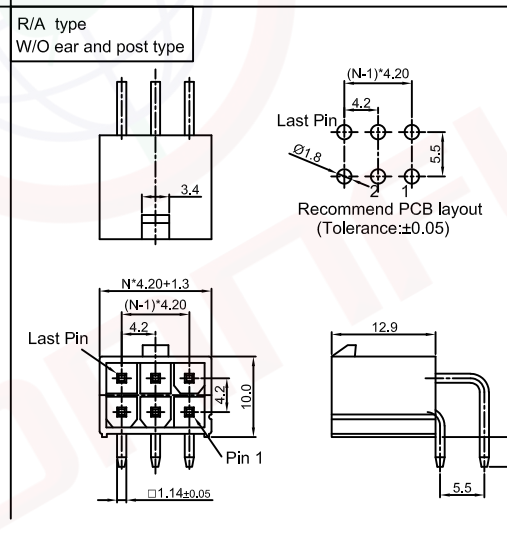
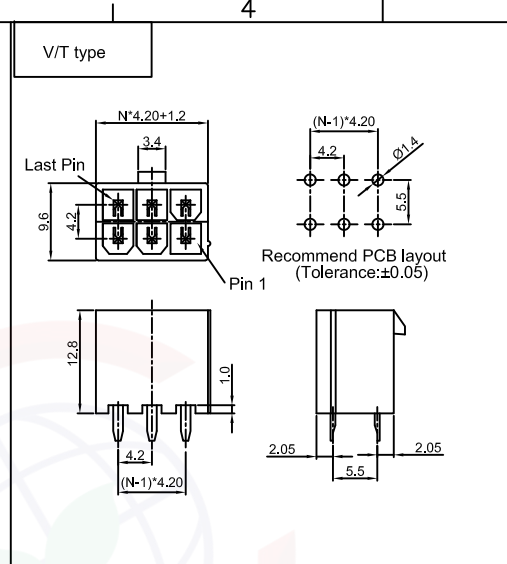
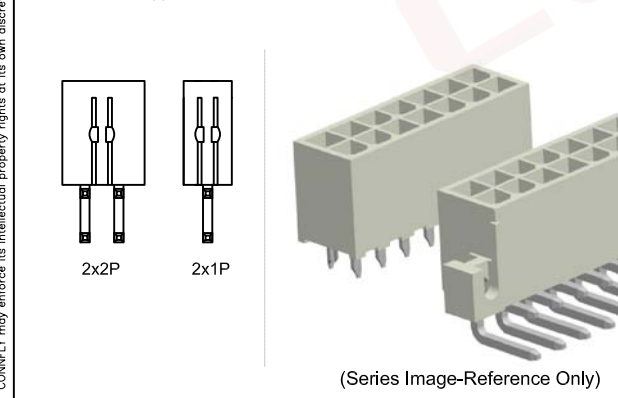
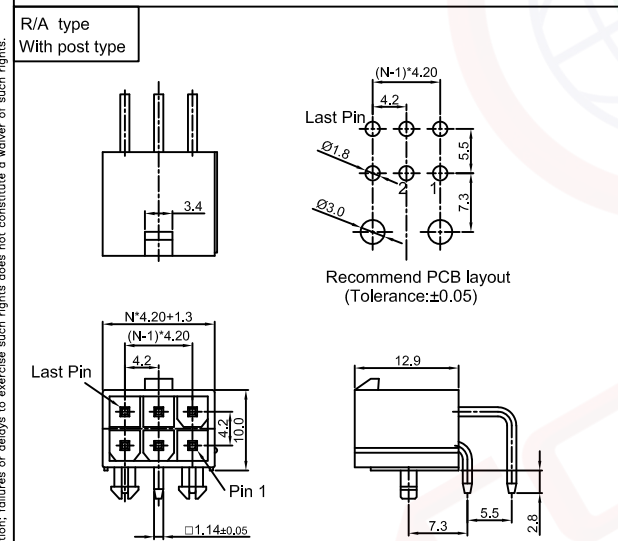


The information provided herein is from CONNLY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNLY or its affiliates. Unauthorized use or modification is strictly prohibited. CONNLY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

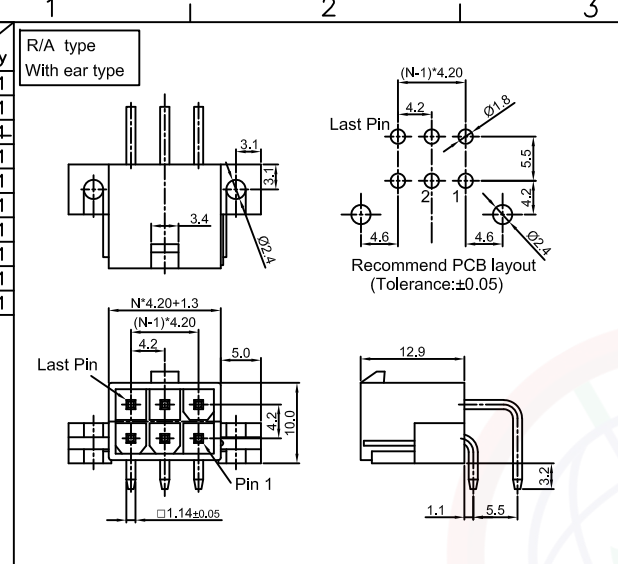

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 12/15/07'		LJC 12/15/07'
D	DRAWING UPDATE	JLZ 05/18/22'		
F	DRAWING UPDATE	JLZ 09/28/24'		
G	DRAWING UPDATE	JLZ 07/01/25'		

NOTES:


Specifications:

- Contact resistance: 30mΩ Max.
- Insulation resistance: 1000MΩ Min.
- Dielectric withstanding voltage: 1000V AC(Rms) for 1 minute.
- Current rating:9A.
- Voltage rating:600V AC/DC.
- Temperature: -25°C~+85°C.

Materials:

- Contact material: Copper alloy.
- Contact plating: Gold or Tin plating over nickel.
- Insulator material: Nylon,Transparent .

Product number code:

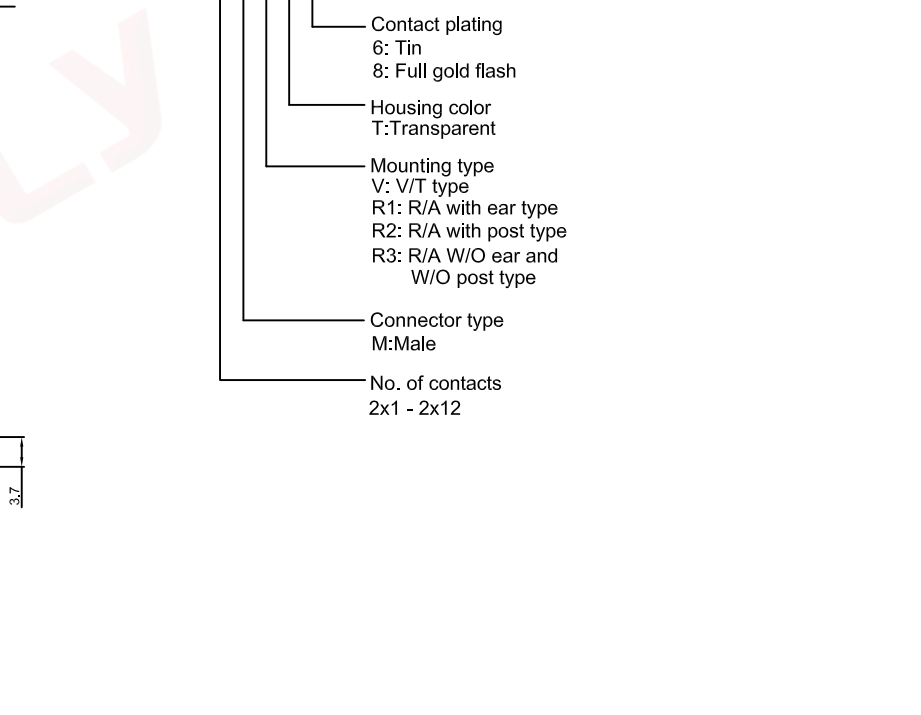

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	4.2mm Connector
X.	±0.60	X.	±5°	UNITS	mm		DIP & R/A type
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1073-01 SERIES
.XX	±0.25	.XX	±2°	晨翔电子有限公司 CONNFLY CONNLY ELECTRONIC CO. LTD			
DRAWING TYPE		CUSTOMER					
SCALE		1:1					
DRAWING NO.		C-DS1073-01-XXXXX-G					