
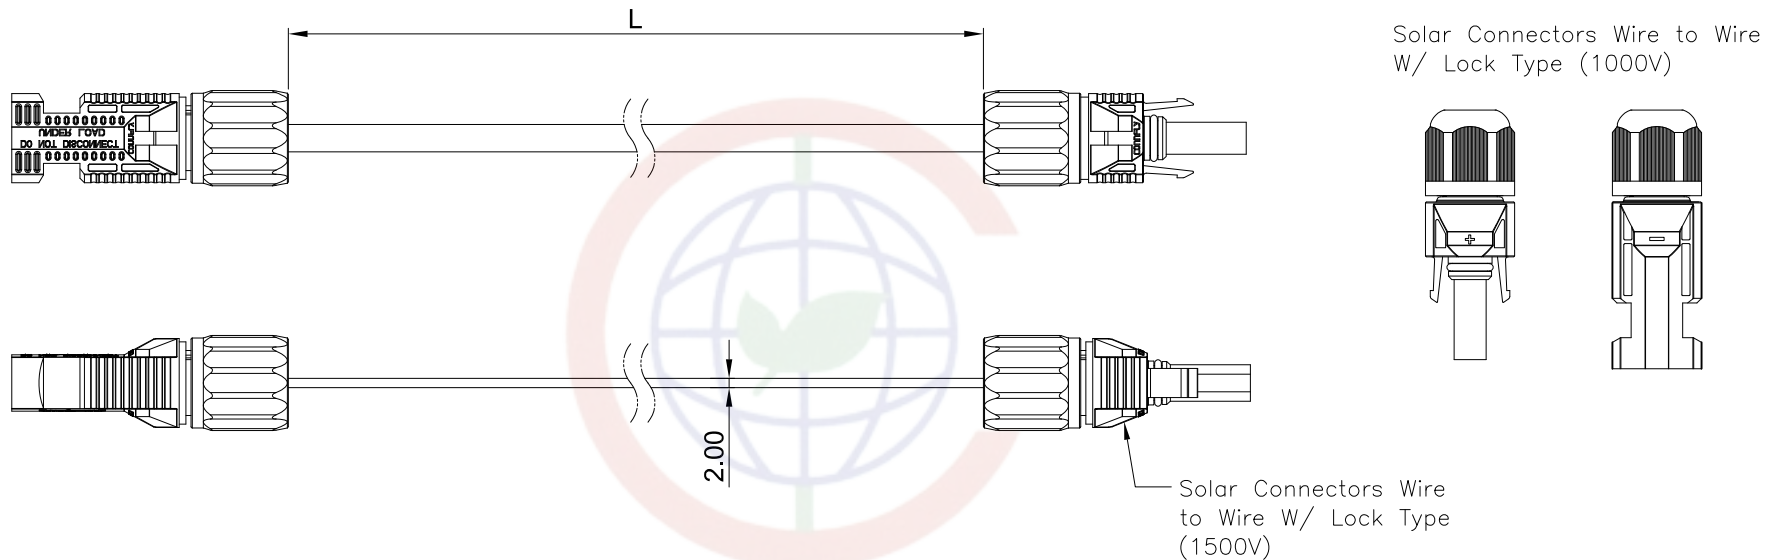


The information provided herein is from CONNELLY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELLY or its affiliates. Unauthorized use or modification is strictly prohibited without prior written consent from CONNELLY. All intellectual properties provided herein are for reference purposes only and does not constitute authorization of its use in any format or manner. CONNELLY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	WPY 02/24/25'		



Note:

Specifications:

1. Rated voltage: 1000/1500V
2. Rated current: 30A



Materials:


1. Insulation material: PVC
2. Conductor material: Tin plated copper
3. Temperature range: $-20^{\circ}\text{C} \sim +90^{\circ}\text{C}$

Product Number Code:

DS1162-86-X X X X X X X

- Cable size:
A:4mm² B:6mm²
- Wire length(Dim L):
0300:300mm
- Voltage type:
H:1500V L:1000V(For 4mm² Only)
- Cable color:
B:Black R:Red
- Contact plating:
6:Tin plated
- Housing color:
B:Black
- ITI:Male+Female

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	Photovoltaic extension flat cable	
X.	±0.60	X.	±5°	UNITS	mm			
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1162-86 Series	
.XX	±0.25	.XX	±2°	 晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD				
DRAWING TYPE		CUSTOMER						
SCALE	1:1	SHEET	1 OF 1					
DRAWING NO.	C-DS1162-86-XXXXXX-A							

 晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD